#### DOCUMENT RESUME

ED 350 480 CE 062 184

AUTHOR Trombley, Carl; And Others

TITLE Mathematics in Power Technology.
INSTITUTION Naugatuck Board of Education, CT.

SPONS AGENCY Connecticut State Dept. of Education, Middletown.

Div. of Vocational, Technical and Adult Education.

PUB DATE 31 Aug 91

NOTE 83p.

PUB TYPE Reports - Descriptive (141) -- Tests/Evaluation

Instruments (160)

EDRS PRICE MF01/PC04 Plus Postage.

DESCRIPTORS Behavioral Objectives; Competency Based Education;

Engines; High Schools; Learning Activities;

Maintenance; \*Mathematical Applications; \*Mathematics Curriculum; Measurement; \*Power Technology; Safety;

Tests

IDENTIFIERS \*Technology Education

#### **ABSTRACT**

This mathematics curriculum is designed to be taught by the technology education teacher during the power technology class over a period of 2 years. It is intended to be elective in nature; upon successful completion of both years, one-half credit in mathematics is to be awarded. A list of the academic competencies contained in the curriculum cites the chapters in which the competencies are located. Each of the 13 units consists of these components: competencies, lesson, and hands-on or written activity sheet. Unit titles are as follows: orientation and safety, tools of the trade, measuring, preventive maintenance, types of engines, engine disassembly, engine lubrication and cooling, electricity and the battery, charging system, starting system, fuel system, brake systems, and careers. Unit worksheets, unit quizzes, and answer keys are appended. (YLB)



<sup>\*</sup> Reproductions supplied by EDRS are the best that can be made

6N:088.0000-901-024000121

# MATHEMATICS IN POWER TECHNOLOGY

## PREPARED BY

NAUGATUCK BOARD OF EDUCATION 380 CHURCH ST. NAUGATUCK, CT 06770

# PREPARED FOR

CONNECTICUT STATE DEPARTMENT OF EDUCATION DIVISION OF VOCATIONAL, TECHNICAL AND ADULT EDUCATION BUREAU OF VOCATIONAL SERVICES MIDDLETOWN, CONNECTICUT

> MR. CARL TROMBLEY MR. HARRISON H. BAKER, JR. MS. COLLEEN PALMER

THIS PROJECT WAS SUPPORTED BY FUNDS MADE AVAILABLE TO CONNECTICUT THROUGH P.L. 98-524

ALL OPINIONS EXPRESSED REFLECT THE VIEWS OF THE AUTHORS AND ARE NOT NECESSARILY THOSE OF THE STATE DEPARTMENT OF EDUCATION

U.S. DEPARTMENT OF EDUCATION
Office of Educational Research and Improvement EDUCATIONAL RESOURCES INFORMATION CENTER (ERIC)

ta This document has been reproduced as received from the person or organization originating it.

☐ Minor changes have been made to improve reproduction quality

Points of view or opinions stated in this docu-ment do not necessarily represent official OERI position or policy

**AUGUST 31, 1991** 

"PERMISSION TO REPRODUCE THIS MATERIAL HAS BEEN GRANTED BY

TO THE EDUCATIONAL RESOURCES INFORMATION CENTER (ERIC)."

90

V

V

# POWER TECHNOLOGY MATHEMATICS COMPONENT

The following curriculum is the result of a joint effort by two instructors from the Naugatuck High School. Ms. Colleen Palmer, representing the Mathematics Department and Mr. Harrison Baker, representing the Technology Education Department. was felt that a program was needed to help make general mathematics more relevant to high school students and to provide the opportunity for a student to earn academic credit while taking a vocational course. The material will be taught by the Technology Education teacher, during the Power Technology class, over a period of two years. It will be elective in nature and upon successful completion of both years one half credit in mathematics will be awarded. It is hoped that this curriculum will lead to the development of other cross credit activities in different areas.



# TABLE OF CONTENTS

# POWER TECHNOLOGY / MATH COMPONENT

Table of Contents - pg. 2

Index of math competencies - pg. 3

UNIT 1 - Orientation and Safety - pgs. 4 - 5

UNIT 2 - Tools of the Trade - pgs. 6 - 7

UNIT 3 - Measuring - pgs. 7 - 13

UNIT 4 - Preventive Maintenance - pgs. 14 - 16

UNIT 5 - Types of Engines - pgs. 17 - 19

UNIT 6 - Engine Disassembly - pgs. 20 - 21

UNIT 7 - Engine Lubrication and Cooling - pgs. 22 - 25

UNIT 8 - Electricity and the Battery - pgs. 26 - 29

UNIT 9 - The Charging System - pgs. 30 - 31

UNIT 10 - The Starting System - pgs. 32 - 33

UNIT 11 - The Fuel System: General - pgs. 34 - 36

UNIT 12 - Brake Systems - pgs. 37 - 39

UNIT 13 - Careers - pgs. 40 - 41

UNIT Quizzes and Worksheets - pgs. 42 - 72

UNIT Answer Keys - pgs. 72 - 81



The following is a list of the academic competencies contained in this curriculum and the chapters in which they are located.

CONCEPTUAL UNDERSTANDINGS:	UNIT(S)
<ol> <li>comparing numbers</li> <li>fractions, decimals, and ratios</li> </ol>	2,8 2,6,7,9,10,11,12
COMPUTATIONAL SKILLS:	
1. addition and subtraction of	
whole numbers	1
of whole numbers	1, 3, 4, 8, 9, 11
	3, 4, 7, 9, 11, 12 2, 3, 4, 6, 7, 9
5. percents	3.5.7
o. percents	3.5.1
PROBLEM SOLVING:	
1. solve process problems	1, 4, 7, 8, 9, 11, 12
2. solve problems involving whole	
numbers, decimals, fractions	
and measurement	1.2.3.4.7.8.9.12
3. identify needed information	-
in problem situations	1, 4, 7, 8, 9, 10, 11
4. solve problems involving	
measurement	1, 2, 3,
5. solve 1 and 2 step problems involving fractions	9.4.0
6. interpret graphs,	2, 4, 9,
tables and charts	3, 4, 7, 8
MEASUREMENT:	
1. Identify figures using	
geometric terms	1
2. measure and determine	
perimeters and areas	1
3. estimate lengths, areas,	
volumes, and angles measurement	1.2
4. make measurement	
CORVERSIONS WITHIN SUSTAMS	1 9 <i>A</i> 7



#### ORIENTATION AND SAFETY

# MATH COMPONENT

# I. Competency:

The student will compute the perimeter, area and volume of a given space.

- A. Determining the Perimeter
- B. Determining the Area
- C. Determining the Volume

#### Problem #1

 Based on State of Connecticut recommendations for classroom size the students will compute the space necessary for their class to be conducted safely.

# STATE RECOMMENDATIONS

- 1. # of students in shop/lab should not exceed 16
- 2. recommended = 144 square feet per pupil
- 3. minimum = 120 square feet per pupil

(Net total sq.ft. Recommended 3600 / Minimum 3000)



## ORIENTATION AND SAFETY

#### HANDS ON ACTIVITY

	1		As	s	i	gn	me	nt	t	•
--	---	--	----	---	---	----	----	----	---	---

Working in teams of two, measure and record the following information:

- a. Room length = \_\_\_\_\_ft. \_\_\_\_\_in.
- b. Room width = \_\_\_\_ft. \_\_\_\_ in.
- 2. Using the information above, compute the following:
  - a. Room perimeter (distance around)

Room Perimeter = \_\_\_\_ ft. \_\_\_ in.

b. Area of the room (Area = Length x Width)

Room Area = \_\_\_\_\_

c. Volume of the room (Volume = Length x Width x Height)

Room Volume = \_\_\_\_\_

- 4. Using the data above determine if room size is sufficient for the number of students attending this class. (see State Requirements previous page)
- 5. Using the data above determine how long it would take a 2500 cubic ft. per minute air purification system to change the air in our room.
- 6. How many air purification units would be required to change all the air in the room in one-half hour?



# TOOLS OF THE TRADE

# MATH COMPONENT

# I. Competencies:

- 1. Given the necessary measuring equipment, students will correctly identify the fractional sizes of wrenches and sockets used in the power mechanics lab.
- 2. Given a list of fractional wrench sizes from 1/4" through 2", the student will arrange them from smallest to largest.

# II. Lesson:

- 1. Each student will be given a ruler, sheet of paper and five wrenches/sockets with their sizes covered. The student will then be instructed how to measure each tool and instructed to record their findings.
- 2. The student will be instructed on how to find the common denominator of the fractional sizes recorded and then instructed to arrange the wrenches/sockets and fractional sizes recorded in order from smallest to largest.



# TOOLS OF THE TRADE HANDS ON ACTIVITY

Ī	As	s	i	g	n	me	ก	t	s	•

<ol> <li>Using the ruler provided measure the tools you were given and record their sizes below.</li> </ol>
1 2 3 4 5
2. Arrange the wrench sizes above from the smallest to the largest.
1 2 3 4 5
3. Find a common denominator for the following fractional wrench sizes and convert each fraction to the common denominator.
3/16" 5/8" 1/2" 3/4" 7/8" 7/16" 9/16" 5/32"
4. Arrange the wrenches above from smallest to largest.
5. A mechanic has a combination wrench set (one size per wrench) which contains wrenches from 1/4" to 1" in 1/16" increments. How many wrenches are in this set?
6. While working on a vehicle a mechanic discovers that his/her 1/2" wrench is too small and the 5/8" wrench is



too large. Knowing that it's not a metric size what

wrench size should he/she try next?

# MATH COMPONENT

#### CUBIC INCH DISPLACEMENT

# I. Competency:

1. Given the necessary measurements and formula the student will compute the cubic inch displacement of an engine.

## II. Lesson:

 Students will be instructed in how to compute the cubic inch displacement of an engine using the formula below, and how to round off their answers to the nearest whole number)

Formula:  $\frac{Bore^2}{A}$  x Pi x Stroke x Number of cylinders = C.I.D.

# **EXAMPLE:**

Bore Stroke Number of Cylinders Answer

4" 5" 6 \_\_\_\_\_\_

#### STEPS:

(4"x 4") x 3.1416 x 5" x 6 cylinders = C.I.D.

 $\frac{16" \times 3.1416 \times 5"}{4} \qquad x \qquad 6 \qquad = \qquad C.I.D.$ 

 $\frac{50.2656 \times 5"}{4}$  x 6 = C.I.D.

 $\frac{251.328}{4}$  x 6 = C.I.D.

62.832 x 6 = C.I.D.

376.992 = C.I.D.



# CUBIC INCH DISPLACEMENT

# WORKSHEET

Formula:  $\frac{Bore^2}{4}$  x Pi x Stroke x Number of cylinders = C.I.D.

# Directions

Using the formula above and the measurements below compute the cubic inch displacement of the following engines. Round off your answers to the closest whole number.

	Bore	Stroke	Number	of Cylinders	Answer
1.	4"	5 "		6	
2.	3"	2 "		4	
3.	6"	4 "		8	
4.	5"	4"		6	
5.	3.5"	4.5"		8	
6.	3.75"	5.5"		4	
7.	4.25"	4"		6	
8.	2.5"	3"		4	
9.	4"	3"		4	
10.	2"	4"		8	

# HANDS ON ACTIVITY

Formula: <u>Bore <sup>2</sup> x Pi x Stroke</u> x Numbe 4	er of cylinders = C.I.D.
I. Assignments:	
<ol> <li>Using a ruler and micrometer, me of one of the engines in the cla information compute its cubic in</li> </ol>	assroom. Using that
a. Engine Number Selected	
b. Bore Diameter	
c. Length of Stroke	
d. Number of Cylinders	
<ol> <li>Using the manuals in the room ch the following information:</li> </ol>	noose a vehicle and record
Vehicle Make	<del></del>
Vehicle Model	
Name of Manual Used	
	Information found on Pg.#
a. Engine bore	<del></del>
b. Engine Stroke	
c. Number of Cyl.	



#### MATH COMPONENT

#### COMPRESSION TESTING

# I. Competency:

1. Students will accurately interpret compression readings by taking a percentage of a reading and subtracting that number from the reading. (see further information and example below)

## COMPRESSION TEST PROCEDURE

When comparing compression test results from various cylinders in an engine, you have to subtract 15% of the highest reading from itself. None of the remaining cylinders should be lower than that reading.

EXAMPLE: A compression test on a four cylinder engine results in the following:

#1 = 195 psi #2 = 180 psi #3 = 175 psi #4 = 185 psi

The highest cylinder is # 1 which reads 195 psi.

15% of this reading is  $.15 \times 195 = 29.25$ 

195 psi - 29.25 psi = 165.75 psi (this is the lowest any other cylinder can be)

The lowest cylinder reading was #3 = 175 psi so this engine is still within specifications.



# HANDS ON ACTIVITY

# COMPRESSION TESTING

I. Assignment	กเ	
---------------	----	--

Using a vehicle provided (or your own) perform a compression test and record the readings below:

Cylinder Number	<u>Ps i</u>
1	
2	
3	
4	
5	
6	
7	
8	

# II. Assignment:

Use the data above and the information you've obtained to determine if this engine is in good mechanical condition.

1.	Highest	reading	=	
----	---------	---------	---	--

- 3. Compare this to lowest reading.
- 4. Check One \_\_\_\_ Engine Good \_\_\_\_ Engine Bad



# COMPRESSION TESTING

# WORKSHEET

Di	r	e	c	t	ł	റ	n	S
		·	•	•		v		3

Solve the following problems using the information in your notebooks and a calculator.

During a compression test a mechanic gets the following readings:

$$#1 = 160 psi$$

#1 = 160 psi #2 = 190 psi #3 = 165 psi

#4 = 180 psi

1. What is the lowest acceptable reading for this situation?

ans. \_\_\_\_\_

2. What is 15% of the reading on cylinder Number 2 ?

ans. \_\_\_\_

3. How many more psi would be required to make #1 cylinder acceptable?

ans. \_\_\_\_

4. How many psi difference is there between the highest and the lowest cylinder above?

ans. \_\_\_\_



## PREVENTIVE MAINTENANCE

#### MATH COMPONENT

# I. Competencies:

- 1. Student will determine when preventive maintenance is to be performed based on time and mileage requirements.
- 2. The student will add various capacities together.

#### II. Lesson:

- 1. Preventive maintenance must be performed on both a mileage and time basis. Each car manufacturer has its own recommendations.
- 2. How often an engines oil is changed depends on:
  - a. the conditions the vehicle is operated in
  - b. how many miles the vehicle has traveled
  - c. how long it has been since the last oil change

EXAMPLE: How many times a year does a driver have to change his/her oil if he/she drives 500 miles each week and changes his/her oil every 3 months or 3000 miles?

500 miles per week  $\times 52$  weeks per year 26,000 miles each year

8.66666 times per year based on mileage 3000)26000

3. Different vehicles require different amounts of oil. Adding whole numbers and fractions is often necessary.



## PREVENTIVE MAINTENANCE

#### HANDS ON ACTIVITY

I	•	As	s	į	g	n	me	n	t	s	:	
---	---	----	---	---	---	---	----	---	---	---	---	--

A customer comes in to the garage with a 1989 Ford Mustang with a 5.0 liter High Output engine. The car is operated in very hot, dusty conditions.

Using the manuals in the room, determine the following:

1.	How	often	does	the	manufacturer	SAV	the	oil	should	be	chang	zed?
	440 11	OLCON	0003	LIIC	manutactui ci	34,7	LMC	~ ~ ~	3110410		CHAIL	<u>.</u>

а.	Every	months.	

- b. Every \_\_\_\_ miles.
- c. Manual used \_\_\_\_\_\_.
- d. Pg. # where you found information \_\_\_\_\_.
- 2. If the manufacturer recommends you change your oil every 3 months or 3000 miles.....
  - a. Based on time only, how often should you change your oil each year?
  - b. How many times a year should you change your oil if you drive 2000 miles each month?
- 3. Three cars are in the garage for oil changes. The first car requires 4 1/2 quarts of oil, the second 3 3/4 quarts and the last 5 1/3 quarts. How much oil will you need to complete all three oil changes?



# PREVENTIVE MAINTENANCE

# WORKSHEET

DIRECTIONS:	Complete the following problems using the information in your notebooks and a calculator. Be sure to show the steps you take. For each problem below use 3 months or 3000 miles for your oil change specifications.
1. If ball joinshould they	nts require lubrication every other oil change, how often be lubricated?
a. I	Every miles
	or
b. 1	Every months
vear. The	is indicate you did an average of two oil changes a day last average oil change produces 4 1/2 quarts of drain oil. Using number of days per year, answer the following questions:
a. How ma	any quarts of drain oil did your garage produce last year?
b. How m	any quarts of drain oil did your garage produce each month?
c. How m	any quarts of drain oil did your garage produce each week?
d. How m compa	uch did it cost to have the oil removed if the waste bil ny charged you 28 cents per gallon?
	per week
	per month



\_\_\_\_ per year

# TYPES OF ENGINES

# MATH COMPONENT

# I. Competencies:

- 1. The student will compute what percentage each cylinder represents in various sized engines.
- 2. Given a graphic illustration, the student will calculate the percentage represented.


#### II. Lesson:

1. Each cylinder in a 8 cylinder engine represents what % of the total engine?

2. Each cylinder in a 6 cylinder engine represents what % of the total engine?

3. 75 % of the cylinders in a 4 cylinder were found to be faulty. How many cylinders were faulty?

4. What % of the engine cylinders below are shaded?





# TYPES OF ENGINES

# WORKSHEET

Ι.	Directions:	Using	your	notebook	and	calculator	compute	the	following
		percer	ntages	s.					_

1. Each cylinder in a 5 cylinder engine represents what % of the total engine?

2. Each cylinder in a 4 cylinder engine represents what % of the total engine?

3. 25 % of the cylinders in an 8 cylinder were found to be faulty. How many cylinders were faulty?

4. What % of the engine cylinders below are shaded?

A.













- 18 -

# TYPES OF ENGINES HANDS-ON ACTIVITY

Ţ		As	s	i	9	n	m	e	n	t	
1	•	n.s	3		5		111	C		·	

•	Soleot a	vehicle	Λn	which	tο	perform	а	cylinder	balance	test
1 .	Select a	venicie	UII	MILCH	ιu	Del roim	•	CJIIIIGCI	Du 1 41100	

a. Vehicle Type

b. Number of cylinders \_\_\_\_\_

c. What percent of the whole does each cylinder represent?

# NOTE: PERFORM THE FOLLOWING ONLY WITH THE TEACHER'S PERMISSION

- 2. Connect the vehicle above to the diagnostic scope.
- 3. Choose the cylinder balance test mode and start the vehicle.
- 4. Electrically "kill" one cylinder and record the % of change.

Percent of change = \_\_\_\_\_

5. Compare your answers for # 1.c. and #4. above. Are they the same? Should they be?

#### ENGINE DISASSEMBLY

#### MATH COMPONENT

# I. Competency:

The student will compute ratios and fractional parts using various engine parts.

# Example:

An engine has 8 cam bearings and 4 main bearings. What fractional part of the engines bearings are used for the cam? What fractional part of the engines bearings are used for main bearings?

8 cam bearings + 4 main bearings = 12 engine bearings

a. 8 out of 12 are cam bearings or 8/12 reduced = 2/3

b. 4 out of 12 are main bearings or 4/12 reduced = 1/3

Conclusion: 2/3 of the engines bearings are for the cam and 1/3 for the main bearings.



# ENGINE DISASSEMBLY

# HANDS ON ACTIVITY

I.	COMPUTE THE FOLLOWING FRACTIONAL PARTS
1.	While removing the spark plugs from an eight cylinder engine a mechanic found that 3 plugs were carbon-fouled, 5 plugs were oil-fouled and 4 plugs had detonation damage.
In	fractional terms answer the following:
	1. What fractional part of the engine's plugs was carbon-fouled?
	ans
	2. What fractional part of the engine's plugs was oil-fouled?  ans
	3. What fractional part of the engine's plugs was damaged by detonation?
	ans



# ENGINE LUBRICATION AND COOLING


# MATH COMPONENT

DIRECTIONS: PLACE THE CORRECT ANSWER IN THE SPACE PROVIDED. REFER TO THE ATTACHED CHART FOR ALL INFORMATION.

1.	Engine operation is considered to be "clean" above what temperature?
2.	What happens to rings and valves at 60 degrees fahrenheit?
3.	How much cylinder wear was there on the engine that was operated at 160 degrees?
4.	How many gallons of gasoline did the engine operating at 100 degrees use per hour? How much did it use during the entire test?
5.	How much horsepower did the engine operating at 40 degrees develop?
6.	At what temperature do "oil screens" begin to freeze?
7.	How much cylinder wear was there on the engine that was operated at 40 degrees?
8.	How much horsepower did the engine operating at 160 degrees develop?
9.	How many gallons of gasoline did the engine operating at 40 degrees use per hour? How much did it use during the entire test?
10.	At what temperature does the "etching of parts" begin?



# ENGINE LUBRICATION AND COOLING 60 HOUR GASOLINE ENGINE TEST

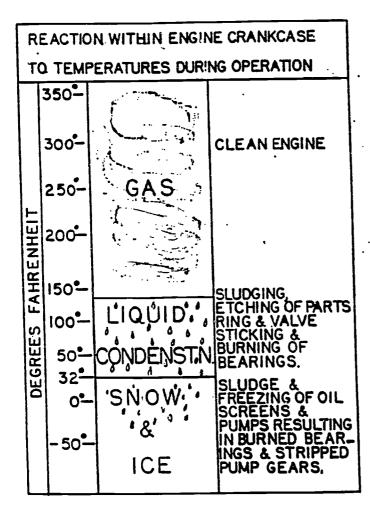


60 HOUR GASOLINE ENGINE TEST

OPERATING TEMPERATURE

40°F LOOF 140°F 180°F

.008 IN. .002 IN. .001 IM. .0005 IM. :0003 IM.

FUEL CONSUMPTION



29.5 HP

26HP 27.2HP 28.5HP 29HP



# ENGINE LUBRICATION AND COOLING

#### MATH COMPONENT

I. Competency:

The student will convert fractions to decimals and vice versa; calculate a percentage; and identify correct points on a graph or line.

Example:

1. If the capacity of a cars cooling system is 21 qts. and 45% of the coolant is antifreeze, how many qts. of antifreeze does the car have in it? How many qts. of water?

21 qts. x 
$$45\% =$$
 qts. of antifreeze

$$\begin{array}{c} 21 \\ \underline{x.45} \\ 9.45 \\ \text{ qts. of antifreeze} \end{array}$$

21 
$$\frac{x.55}{11.55}$$
 qts. of water

2. The manufacturer recommends a mixture of 50% water and 50% antifreeze. The car you are servicing has a cooling system capacity of 17 qts. How many qts. of antifreeze will you need to refill the system after it has been drained?

$$\frac{17}{x.50}$$
8.5 qts. of antifreeze

3. Using the chart on the antifreeze container, determine the amount of antifreeze needed for a car with a cooling system capacity of 23 qts.



# ENGINE LUBRICATION AND COOLING

# HANDS ON ACTIVITY

1.	Using the manuals in t front of the room look up the following car and calculate the amou of antifreeze you will need after draining and flushing the cooling system.
	1988 Chev. Caprice, 305 cubic inch engine, with air conditioning
	Cooling system capacity =qts.
	Recommended mixture 50 / 50
	Qts. of antifreeze required =qts.
2.	A customer enters your garage and asks to have his/her car winterized. You determine that the car has a 19 qt. cooling system. How many qts. of antifreeze will you need to complete the job?
	qts.
3.	Looking at the jobs scheduled for the next day you find that you have two cars to be winterized. One car has a 13 qt. capacity and the other a 18 1/2 qt. capacity. How many qts. of antifreeze will be needed to complete both jobs?
	qts.
4.	How many gallons would you have to purchase to complete all the jobs on this page?



\_\_\_ gals.

# MATH COMPONENT

I. Competency:

The student will solve for the unknown value when given the Ohms' Law formula.

E = I X R

I = E/R

R = E/I

E = VOLTS (volts) I = CURRENT (amps) R = RESISTANCE (ohms)

1. A mechanic is testing a component on a vehicle that has a 12 volt battery and he/she gets a reading of 6 ohms. How many amps are there in the circuit?

I = E/R

2. During a battery draw test a mechanic gets a reading of 100 amps. The starters resistance measures 1200 ohms. What is the battery voltage?

E = I X R

3. An old VW beetle with a 6 volt battery comes into your garage. While testing the wiper motor you get a reading on your ammeter of .05 amps. What is the resistance of this motor?

R = E/I

4. How much current will a light bulb with 12K ohms (12,000 ohms) draw when connected to a 36 volt battery?

I = E/R

5. How many volts are being applied to a circuit with a reading .004 amps if the resistance is equal to 6K (6000 ohms)?

E = I X R



# OHMS LAW

DIRECTIONS: USING THE FOLLOWING FORMULAE SOLVE THE PROBLEMS BELOW. BE SURE TO SHOW ALL WORK AND LABEL YOUR ANSWERS.

$$E = I X R$$

$$I = E/R$$

$$R = E/I$$

E = VOLTS (volts) I = CURRENT (amps) R = RESISTANCE (ohms)

- 1. 3 volts .005 amps resistance =
- 2. 6 volts 1200 ohms current = \_\_\_\_
- 3. 2.5 amps 300 ohms voltage =
- 4. .06 amps 12 volts resistance =
- 5. 2400 ohms 12 volts current =
- 6. I = .002 E = 36 R = ?
- 7. I = ? E = 6 R = 1500
- 8. I = .08 E = ? R = 1650
- 9. I = 2 E = .5 R = ?
- 10. I = ? E = 3 R = 900

# OHMS LAW

DIRECTIONS: USING THE FOLLOWING FORMULAS SOLVE THE PROBLEMS BELOW. DO NOT WRITE ON THIS TEST. PLACE YOUR ANSWER ON THE SHEET PROVIDED.

 $E = I \times R$  I = E/R R = E/I

E = VOLTS (volts) I = CURRENT (amps) R = RESISTANCE (ohms)

- 11. A mechanic is testing a component on a vehicle that has a 12 volt battery and he gets a reading of 3 ohms. How many amps are there in the circuit?
- 12. During a battery draw test a mechanic gets a reading of 200 amps. The starters resistance measures 2400 ohms. What is the battery voltage?
- 13. An old VW beetle with a 6 volt battery comes into your garage. While testing the wiper motor you get a reading on your ammeter of .02 amps. What is the resistance of this motor?
- 14. How much current will a light bulb with 12K ohms (12,000 ohms) draw when connected to a 12 volt battery?
- 15. How many volts are being applied to a circuit with a reading .003 amps if the resistance is equal to 6K (6000 ohms)?

16. 6 volts .005 amps resistance =

17. 4 volts 1200 ohms current =

18. 2.5 amps 600 ohms voltage = \_\_\_\_

19. .04 amps 12 volts resistance = \_\_\_\_\_

20. 1200 ohms 12 volts current = \_\_\_\_\_

# HANDS ON ACTIVITY

# OHMS LAW

DIRECTIONS:	USING THE EQUIPMENT	PROVIDED IN 1	THE FRONT OF THE	ROOM MEASURE
DI II DO I I OIL D	THE AMOUNT OF CURRE	NT, VOLTAGE AN	ND RESISTANCE IN	EACH OF THE
	CIRCUITS.			

P	ART	r	T
T.	<b>~11</b>		

, ,	D/11	1 .1.	•	-
	RCU		-	

- 1. AMPS = \_\_\_\_\_
- 2. VOLTAGE = \_\_\_\_\_

# CIRCUIT # 2

- 1. AMPS = \_\_\_\_\_
- 2. RESISTANCE = \_\_\_\_\_

# CIRCUIT # 3

- 1. VOLTAGE = \_\_\_\_\_
- 2. RESISTANCE = \_\_\_\_\_

# PART II

DIRECTIONS: USING THE FORMULAE GIVEN BELOW AND THE READINGS YOU OBTAINED ABOVE SOLVE FOR THE UNKNOWN VALUE.

$$E = I X R$$

$$I = E/R$$

$$R = E/I$$

$$E = VOLTS (volts)$$

CIRCUIT 1 - RESISTANCE = \_\_\_\_

CIRCUIT 2 - VOLTAGE = \_\_\_\_\_

CIRCUIT 3 - AMPERAGE = \_\_\_\_\_



# THE CHARGING SYSTEM

# MATH COMPONENT

# I. Competency:

The student will determine the condition of an alternator by multiplying the alternators output by a fraction.

# **EXAMPLE:**

While testing an alternator a mechanic reads the following: "During this test alternator output should not be less than 2/3's of the total rated alternator output."

- 1. If the alternator rated output is 60 amps. what is the minimum acceptable output?
- 2. If the alternator rated output is 100 amps, what is the minimum acceptable output?
- 3. If the alternator rated output is  $50\ \mathrm{amps}$ , what is the minimum acceptable output?



# THE CHARGING SYSTEM

# HANDS ON ACTIVITY

DIRECTIONS: USING THE EQUIPMENT PROVIDED MEASURE AND RECORD THE FOLLOWING INFORMATION ABOUT YOUR / TEST VEHICLE.

1.	BATTERY VOLTAGE	=	 VOLTS
2.	CHARGING AMPERAGE	=	 AMPS
3.	CHARGING VOLTAGE	=	 VOLTS
4.	STARTER DRAW	=	AMPS



# THE STARTING SYSTEM

#### MATH COMPONENT

# I. Competency:

Given the size of two mechanical components the student will determine their ratio.

# **EXAMPLE:**

There are 200 teeth on an engines flywheel and 10 teeth on the engines starter drive.

What is the ratio between the starter drive and the flywheel?

20:1

How many times must the drive turn in order to turn the flywheel once?

20 times



# THE STARTING SYSTEM

# HANDS ON ACTIVITY

DIRECTIONS: USING ONE OF THE DEMO ENGINES IN THE ROOM, COMPUTE THE RATIO OF THE STARTER DRIVE AND FLYWHEEL BY COUNTING THE TEETH AND MEASURING THE DIAMETER OF BOTH COMPONENTS.

ENGINE SIZE		
STARTER TYPE	<del></del>	
DRIVE DIAMETER		
# TEETH ON DRIVE		
# TEETH ON FLYWHEEL		
FLYWHEEL DIAMETER		
	RATIO BY DIAMETER	=
	RATIO BY # OF TEETH	=



# THE FUEL SYSTEM: GENERAL

#### MATH COMPONENT

- I. Competencies:
  - 1. Given the necessary information students will:
    - a. accurately compute "miles per gallon"
    - b. accurately compute necessary fuel requirements for different length trips
    - c. accurately compute the cost of travel based on M.P.G., distance traveled and current fuel prices

#### II. Lesson:

1. How many miles per gallon does a vehicle get if it travels 300 miles on 15 gallons of fuel?

$$\frac{20}{15)300} \text{ mpg}$$

- 2. You are planning a trip across country which will be about 5200 miles. Your car gets 26 miles per gallon.
  - a. How much fuel will you need to complete your trip?

b. How much money will you need for fuel if fuel costs \$1.28 per gallon?



### THE FUEL SYSTEM: GENERAL

### HANDS ON ACTIVITY

I. Assignment
---------------

Within the next three weeks compute the MPG of your family car. Record the following information:

e f	ollowing information:
1.	Odometer reading after filling the gas tank completely.
	miles
2.	Odometer reading at next fill up, the number of gallons it took to fill the tank, type of gas (regular, unleaded, super) and the price per gallon.
	a miles
	b number of gallons to fill tank
	c type of gasoline
	d price per gallon
3.	Subtract the odometer reading recorded in number 1. from the one you recorded in number 2. and record the number of miles traveled.
	Odometer reading #1.  - Odometer reading #2.  Miles traveled
	a number of miles traveled

4. Divide the number of miles that were traveled by the number of gallons of gasoline it took to fill the tank in #2. Your answer will be the number of miles per gallon your vehicle gets.

miles traveled # gallons



### HANDS ON ACTIVITY

### THE FUEL SYSTEM: GENERAL

I		A	s	S	ì	g	n	m	е	n	t	:
---	--	---	---	---	---	---	---	---	---	---	---	---

Using the map provided:

1.	Compute	and	record	the	distance,	in	miles,	bet ween	your	house
	and the	High	School	l.						

\_\_\_\_ miles

2. How many miles would you travel if you drove round trip from your house to school every day during the school year? (NOTE: there are 180 school days each year

# miles X 2 = miles driven per year to school

miles

3. Based on the information above how many gallons of gas would you require during the school year?

# of gallons required MPG miles traveled

4. How much will it cost you to drive to school each day based on your gas stations current prices?



#### BRAKE SYSTEMS

### MATH COMPONENT

I	. (	C	ი	m	D	e	t	e	n	c	y	:

Given the necessary measuring equipment students will:

- 1. determine the thickness of a brake rotor and the diameter of a brake drum
- 2. calculate the amount of material that can be safely removed during a rotor/drum resurfacing operation

### II. Lesson:

- 1. As part of a good brake job, mechanics must be able to resurface brake drums and rotors correctly and safely. A good visual inspection and cleaning followed by accurate measuring is essential.
- 2. Students will:
  - a. measure both a drum and rotor recording the drums diameter and the rotors thickness

min. rotor thick. \_\_\_\_

	rotor thickness
b.	determine the maximum diameter the drum can be using references found in the room
	max. drum dia
c.	using references found in the room determine the minimum

d. calculate the maximum amount of material which may be removed from both the drum and the rotor and record below

rotor	
drum	



#### BRAKE SYSTEMS

#### WORKSHEET

Directions: Calculate the following and record your answers.

1. While performing a brake job on a 1969 Chevy Camero a mechanic measures the brake drum and obtains a reading of 9.535". The manual indicates that the drums original diameter was 9.5". The following information is stamped on the brake drum; "MAX. DIA. 9.560". How much material can the mechanic safely remove?

2. A mechanic measures a used brake rotor and finds that it is .997" thick. The manual indicates that the original thickness was 1.00" and that the discard thickness is .960" How much material can be removed from this used rotor? How much material can be removed from a new rotor?

3. A drum measures 11.046" in diameter. This is .046" oversize. If the drum was never resurfaced what was the original drum diameter?

4. A rotor measures .892" thick. Discard thickness is listed as .860". How much material may still be removed?



## BRAKE SYSTEMS

## HANDS ON ACTIVITY

Ι.	Assign system provid	n (standard or	he following metric), and	measurements, using the appropriate d record your findings in the space
	A. F	Rotor -		
	1.	Select a roto	or, measure i	ts thickness and record below.
		a		in./mm thick
	2.	Determine th	is rotors ori	ginal thickness and record below.
		a		in./mm
	3.	Find this rot	tors minimum	or discard thickness and record below.
		a		in./mm
	4.	Using the incretor has we	formation you rn and how mu	recorded above, calculate how much the ch material may still be removed.
		a	in	./mm of wear
		b	in	./mm of material remaining
	В.	Drum -		
	1.	Select a dru	m and measure	e its diameter.
		a		in./mm diameter
	2.	Determine th	is drums orig	inal diameter and record below.
		a		in./mm diameter
	3.	Calculate th	e amount this	drum is worn.
		a		_ in./mm of wear
	4.		formation you be safely re	u recorded above, calculate how much emoved.
		a		_ in./mm of remaining material



#### **CAREERS**

## MATH COMPONENT

## I. Competency:

With the use of reference materials in the room students will correctly fill out a "work order form" (see attached) including:

- 1. Owner information
- 2. description of vehicle, date, mileage....
- description of work performed, and amount of time necessary to complete the work.

#### II. Lesson:

All members of the class will complete an estimate using a Work Order Form for the following job:

Replace the exhaust system on a 1986 Buick Station Wagon from the catalytic converter back. It has a 350 cu. in. engine, 4 barrel carb. and 2 1/2" tailpipe. Use your name and address where customer information is needed. Be sure to list all pipes, hangers and clamps required. List all prices and the amount of time it will take to perform this job. Finally, compute how much the labor will be using an hourly rate of \$33.50/hr. Add both the labor and parts together for the total cost of the repair.



## **CAREERS**

## HANDS ON ACTIVITY

## I. Assignment:

Complete a work order form for a "major engine tune-up" for your or your family car. Be sure to fill out form completely. Use references in the room to determine necessary parts, hours required etc. Calculate the cost of this operation.

					<u> </u>												i	
•		ļ ——	-		40			1	*****								- 1	
		<u> </u>	<u> </u>		1_			1									1	
<b>144</b>	PART No.	AND PART HAND		PROD	I	AMOU	•		40000					_		944		9.4
					Т	$\top$			97							Property		12.0
					7											-		
					1		1					1	100000			-		**
					7													i
-1				$\vdash$	7	_	7							_				
_				$\vdash$	+	$\dashv$		╼┥		14	I.S.	POV	VER	TE	CH			- (
				$\vdash$	╅	$\dashv$	-		1	•				-	<b>•</b> • • • • • • • • • • • • • • • • • •			- 1
				1	-					Name								1
				┝	-+		-4						_					1
				┝┷	-+					Dotto_		-	TH		_	·		1
				$\vdash \rightarrow$	4													1
					_				73.10			11.45	aIII-IA	40			AHON	E
											F	Sille		" <u> </u>	<b>#</b>			
																		]
						I							_					
					7													
					$\neg$													
_														_				
_				t														
	<del> </del>						$\vdash$											
-	<del> </del>			╂╼┧				-	1									
├	<del>}</del> _			1-1	-	$\vdash$	-	┡—	}									
⊢	<del> </del>			₩		<u> </u>	<b> </b>	<b>├</b> ─	╂—									
<u>                                     </u>	<del> </del>	_		1-			┞—	<u> </u>	<b>↓</b>									
	4						<u> </u>	<u> </u>	1									<u> </u>
	<b>-</b>	<del></del>		1_			_	<u> </u>	<u> </u>									
	<b></b>								<u>.                                    </u>									<u></u>
								1	100 0	erentin fo	lan a lan	ps to Cam	y Arthuba L	at a Can is	Çan d	Span Juggs		
Г				1			1		13				<del>-</del>					
				1		lacksquare	<b>T</b>		132							Spen Park		
	<del>                                     </del>			1-	$\vdash$	<del>                                     </del>	+-	<del>i -</del>	1		mp. I enderdeed	ن منبعاب ا		-	****	TAE		
┢	1			1	$\vdash$	1-	+-	╂								IOIA		
<u> </u>			TOTAL	1	<u> </u>		_	1	9000	•						AMOUNT	L	<u> </u>



# MATH COMPONENT - POWER TECHNOLOGY QUIZZES AND WORKSHEETS

## UNIT 1 WORKSHEET

- 1. Calculate the following:
- 1. 684 827 +139

2. 2 (643 + 524)

 $3. \quad 6 \quad (87) + 3 \quad (60)$ 

4. (64) (192)

5. 753 x281 6. (82) (95) (17)

CARRY OUT TO 3 DECIMAL PLACES. ROUND OFF TO TWO DECIMAL PLACES.

7. 24 647

8. 159 3008

- 9. 373 82194
- 10. Convert the following:

102 inches = \_\_\_\_ ft. \_\_\_ inches

6.4 mm = \_\_\_\_ cm

1472 cm = \_\_\_\_ meters

1 inch = \_\_\_\_ cm

- 43 -

### UNIT 1 QUIZ

Directions: Calculate the following and place your answer on the paper provided.

- 1. 6(86 + 15)
- 2. (383) (26)
- 3. (43) (17) (52)

CARRY OUT TO THREE DECIMAL PLACES. ROUND TO TWO DECIMAL PLACES

- 4. 38 6671
- 5. Directions: Convert the following and place your answer on the paper provided.

4 ft. 8 inches = inches

303 inches = \_\_\_\_ ft. \_\_\_ inches

62 cm = \_\_\_\_ m

10 m = \_\_\_\_ cm

1 inch = \_\_\_\_ cm

Use the following information for questions #6-110

A room measures 20' 4 " wide, 22' 6"long and is 10' 2" high.

- 6. The rooms perimeter = \_\_\_\_
- 7. The rooms area = \_\_\_\_\_
- 8. The rooms volume = \_\_\_\_\_
- 9. How many gallons of paint will it take to cover the floor of the room if each gallon of paint covers 100 square feet?
- 10. How long would it take a 1500 cubic ft. per minute air purification system to change the air in the room?



#### UNIT 2 WORKSHEET

Directions: Place all your answers in the space provided.

1.	Using the ruler	provided,	measure	the 1	length	οf	t he	following	line
	segment to the								

answer \_\_\_\_

2. Using the ruler draw a line segment that is 2 3/8" long in the space provided.

FOR PROBLEMS # 3 -5, FIND THE COMMON DENOMINATOR AND CONVERT EACH FRACTION TO COMMON DENOMINATOR FORM. ORDER FRACTIONS FROM SMALLEST TO LARGEST IN EACH PROBLEM.

- 3. 1/2, 1/4, 2/3
  smallest \_\_\_\_\_ largest
- 4. 2/5, 2/4, 3/10, 7/20

  smallest \_\_\_\_\_ largest

COMPUTE PROBLEMS # 6 - 9 BY ADDING THE GIVEN FRACTIONS. REDUCE ALL ANSWERS IF POSSIBLE.

$$6. 4/12 + 3/12 + 1/12 = \underline{\hspace{1cm}}$$

7. 
$$1/2 + 1/4 + 1/8 =$$
\_\_\_\_\_

9. 
$$2/20 + 7/15 + 4/10 =$$

10. Name a fraction that is larger than 1/4 and smaller than 7/16.

answer \_\_\_\_\_

## UNIT 2 QUIZ

Directions: Calculate the following and place your answer on the paper provided.

1.	Estimate to the neares line segment.	t 1/16	of an	inch	the	length	<b>~</b> £	4 4 -	0.11
	line segment.					rength	01	tne	rorrowing



$$3/16 + 2/8 + 1/32 =$$

4. Add the following: (reduce if possible)

$$2/7 + 6/77 + 4/11 =$$

5. Add the following: (reduce if possible)

$$1/4 + 2/5 + 1/6 =$$

FOR PROBLEMS # 6 - 7 FIND THE COMMON DENOMINATOR AND CONVERT EACH FRACTION TO COMMON DENOMINATOR FORM. ORDER FRACTIONS FROM SMALLEST TO LARGEST IN EACH PROBLEM.

6.	1/16	1/2,	3/8,	14/32	2/4
	smallest				largest
7.	2/5,	3/10	4/5,	5/20	

A mechanic has a combination wrench set (one size per wrench) which contains wrenches from 1/4" to 2" in 1/4" increments. How many wrenches are there in this set?

9. While working on a vehicle a mechanic discovers that a 3/4" wrench is to small for the job and a 7/8" is too large. Knowing that it's not a metric size what wrench size should he try next?

10. A mechanic needs a 3/8" wrench. He takes three wrenches from the tool box and tries each. Two wrenches are to small and one is too large. The 3 wrenches were labeled 1/4", 1/2" and 5/16" which wrench was too large and which were too small?

small:	 ,		4.0	large:	
		_	46	-	

## UNIT 3 WORKSHEET

Directions: Compute the following problems. Place all your answers in the space provided.

MULTIPLY:

- 1. 2.8 x.63
- 2. <u>x.035</u>
  - 64.9 3. (14.6) (29.8)
- 4. (8.2) (4.6) (.613) 5. (23.6) (10.4) (8)

DIVIDE: CARRY OUT TO THREE DECIMAL PLACES AND ROUND TO TWO

6)824.6 6.

 $7. 4 \overline{)28.04}$ 

ROUND TO THE NEAREST WHOLE NUMBERS:

- 8. 62.019
- 9. Find 28% of 82
- 10. Find 83% of 104

#### UNIT 3 QUIZ

Directions: Calculate the following problems and place your answers on the paper provided.

MU	L	T	I	P	L	Y

1. 46.2

2. (63.6) (1.83)

DIVIDE

90.5

7 82.06 3.

## ROUND TO THE NEAREST WHOLE NUMBER

- 4. 6.496
- 5. Find 42% of 16 \_\_\_\_\_

USE THE FOLLOWING INFORMATION FOR #6-9. DURING A COMPRESSION TEST A MECHANIC GETS THE FOLLOWING READINGS:

- 6. What is the lowest acceptable reading for this situation?
- 7. What is 15% of the reading on cylinder #2?
- 8. How many more psi would be required to make #1 cylinder acceptable?
- 9. If the highest reading were 165 psi, would cylinder #1 be acceptable? (Show your work.)

USE THE FOLLOWING FORMULA TO CALCULATE THE PROBLEMS BELOW.

BORE X Pi x STROKE X NUMBER OF = C.I.D.CYLINDERS

- 10. BORE # of CYL. ANS. STROKE
- а. 3.5" 6 b. 4..25" 4.5" 8

#### UNIT 4 WORKSHEET

Directions: Compute the following problems. Place all your answers in the space provided.

ADD:

1. 
$$\begin{array}{r} 2 & 1/2 \\ +6 & 1/3 \end{array}$$

## MAKE THE FOLLOWING CONVERSIONS

## MULTIPLY

4. 
$$3 \frac{1}{2} \times 3 =$$

5. 
$$4 \times 5 \frac{3}{7} =$$

ADD: (simplify improper fractions)

7. 
$$6 + 2 \frac{1}{2} =$$
\_\_\_\_

9. Multiply 32 cents by 485 and write in dollar notation.

DIVIDE

10. 38 462



## UNIT 4 QUIZ

Directions: Calculate the following problems and place your answers on the paper provided.

ADD

- 1.  $3 \frac{2}{3}$  2.  $8 \times 2 \frac{2}{3} =$   $4 \frac{1}{4}$   $+5 \frac{1}{2}$
- 3. CONVERT

33 quarts = \_\_\_\_ gallons \_\_\_\_ quarts

3 gallons = \_\_\_\_ quarts

1 year = \_\_\_\_ weeks

- 4. Multiply 27 cents by 618 and express in dollar notation.
- 5 Divide 57)8601 and round to the hundredths decimal place.
- 6. If the manufacturer recommends you change your oil every 3 months or 3 thousand miles; how many times per year should you change your oil if you drive 1800 miles each month? (show your work)

USE THE FOLLOWING INFORMATION FOR # 7 - 9.

Records indicate that your business did an average of two oil changes per day last year. The average oil change produces 4 1/4 quarts of drain oil. Using 365 as the number of days in a year....

7. How many quarts of drain oil did your garage produce last year?



- 8. The waste oil company will come each time you accumulate 100 gallons of waste oil. How many times during the year did the waste oil company need to come?
- 9. How much did it cost to have the oil removed for one year if the waste oil company charged you 34 cents per gallon?
- 10. A customer drives their car 27,000 miles in one year. They change the oil every 3000 miles. If oil costs \$1.69 per quart and each oil change requires 3 quarts of oil to complete, what is the cost for the oil for 1 year?

### UNIT 5 WORKSHEET


Directions: Compute the following problems. Place all your answers in the space provided. Round to whole percentages.

## **CONVERT TO PERCENTAGES:**


- 1. 2 out of 4 \_\_\_\_\_\_%
- 2. 3 out of 7 \_\_\_\_\_ %
- 3. 12/35 = \_\_\_\_\_%
- 4. 10% of what number is 4? \_\_\_\_\_
- 5. 25% of 16 is what number?
- 6. 62 is what percent of 248?




What percent is shaded?



What percent is shaded?



What percent is shaded?



What percent is shaded?

10.

## UNIT 5 QUIZ

Directions: Convert to a percentage: (round to 2 decimal places if necessary)

- 1. 7 out of 9 = \_\_\_\_\_ %
- 2. 9/12 = \_\_\_\_\_ %
- 3. 14% of what number is 2.8? \_\_\_\_\_



What percent is shaded? \_\_\_\_\_%

5.

What percent is shaded? \_\_\_\_\_ %

6. Each cylinder in a four cylinder engine represents what % of the total engine cylinders?

\_\_\_\_\_ %

7. 75% of the cylinders in a 8 cylinder engine were found to be faulty. How many cylinders were faulty?

\_\_\_\_\_ cylinders

8. If 3 of the cylinders in a 8 cylinder engine were found to be faulty what % of the cylinders are faulty?

- 9. Two vehicles come to your garage each have faulty cylinders. The first, a 6 cylinder, has 2 faulty cylinders the second, a 4 cylinder, has 1 faulty cylinder. Which engine has the higher % of faulty cylinders? (show all work)
- 10. A 4 cylinder car with 2 faulty cylinders gets 1 of its cylinders repaired. What percent of the damaged gets repaired?



#### UNIT 6 WORKSHEET

Directions: Compute the following problems. Reduce answers if possible and place in the space provided.

USE THE FOLLOWING INFORMATION FOR # 1 - 5

A car dealer has 4 red, 3 green, 8 purple, 1 black, and 2 blue cars on the lot.....

- 1. What fractional part of the total lot is the purple cars?
- 2. What fractional part of the total lot is the green cars?
- 3. By combining the red and green cars, what fractional part of all the cars does this represent?
- 4. If all but the black car are considered 1 group, what fractional part of all the cars does this represent?
- 5. What fractional part of the total cars on the lot is the collection of cars with even numbered amounts?
- 6. Express 11 out of 121 as a reduced fraction.
- 7. Express 9 out of 9 as a reduced fraction.
- 8. A box of twelve spark plugs contained two different sizes of spark plugs. One third of the spark plugs were type A. How many were type B?



- 9. Two different kinds of hex wrenches were combined to form a collection of twenty five wrenches. Ten of the wrenches were small sizes. Express as a reduced fraction the number of larger type of wrenches out of the total number of wrenches.
- 10. 5 out of 6 cars on the dealers lot have 4 cylinder engines. Express in words what this statement means.



#### UNIT 6 QUIZ

Directions: Calculate the following and place your answer in the space provided. Reduce answer if possible.

## USE THE FOLLOWING INFORMATION FOR # 1 - 5

A car dealers lot contains 9 white, 7 blue, 5 red and 3 yellow cars.

- 1. What fractional part of the total lot is the collection of blue cars?
- 2. If red and yellow cars were combined into one group what fractional part of the total number of cars would they represent?
- 3. If the red and blue cars were combined what fractional part of all the cars does this represent?
- 4. What fractional part of the total lot is the collection of white cars?
- 5. Express as a reduced fraction 34 out of 51 \_\_\_\_\_\_.
- 6. If half of all the spark plugs in an 8 cylinder engine were carbon fouled, this could be expressed as \_\_\_\_\_ out of every \_\_\_\_\_ plugs would be carbon fouled.

### USE THE FOLLOWING INFORMATION FOR # 7 - 10

While removing the spark plugs from a 12 cylinder engine a mechanic found that 4 plugs were carbon fouled, 6 plugs were oil fouled and two plugs had detonation damage.



In fractional terms answer the following:

- 7. What fractional part of the engine's spark plugs was carbon fouled?
- 8. What fractional part of the engine's spark plugs was oil fouled?
- 9. What fractional part of the engine's spark plugs was damaged by detonation?
- 10. What fractional part of the engine's spark plugs was not damaged by detonation?

### UNIT 7 WORKSHEET

Directions: Compute the following problems and place in the space provided.

1. CONVERT THE FOLLOWING % TO DECIMALS

PERCENT	DECIMAL	EQUIVALEN

ADD

7. 
$$6 \frac{1}{2} + 4 \frac{1}{3} + 8 \frac{3}{4} =$$

8. CONVERT THE FOLLOWING



USE THE FOLLOWING CHART TO DETERMINE HOW MUCH ANTIFREEZE IS REQUIRED TO PROVIDE PROTECTION TO -34 F. FOR THE COOLING SYSTEM CAPACITIES LISTED (#9 - 12)

# QUARTS OF ETHYLENE GLYCOL REQUIRED FOR PROTECTION TO TEMPERATURES SHOWN

Cooking System Capacity				Number	of Quar	s of ETI	YLENE	GLYCC	XL Requi	red for F	rotection	n		
Quarts	1	2	3	4	5	6	7		9	10	11	12	13	14
10	+24°F.	+16°F.	+ 4%	_ 12°F.	-34°F.	-62°F.								
11	+25	+ 15	+ 8	- 8	-23	-47								
12 13	+26	+ 19	+ 10	0	- 15	-34	-57°F.							
13	+27	+21	+ 13	+ 3	- 9	-25	-45							
14			+15	+ 6	- 5	- 18	-34							
15	}		+16	+ 8	0	- 12	-26							
16			+17	+10	+ 2	- 8	-19	-34°F.	-52°F.					
17			+18	+ 12	+ 5	- 4	- 14	~27	-42					
17 18 19 20	ļ		+19	+14	+ 7	0	- 10	-21	-34	-50°F.				
19	1		+20	+ 15	+ 9	+ 2	- 7	~16	-28	-42				
20	j			+ 16	+10	+ 4	- 3	- 12	-22	-34	-48年.		•	
21				+17	+12	+ 6	0	- 9	-17	-28	-41			
22	l			+ 18	+ 13	+ 8	+ 2	- 6	-14	-23	-34	-47°F.		
23				+ 19	+14	+ 9	+ 4	~ 3	-10	- 19	-29 -23	-40		
24	l			+ 19	+15	+10	+ 5	0	- 8	- 15	-23	-34	~48°F.	
21 22 23 24 25				+ 20	+ 15	+12	+ 7	+ 1	- 5	- 12	-20	-34 -29	-40	-50°F.
28	1				+17	+13	+ 8	+ 3	- 3	- 9	- 16	25	-34	-44
26 27 28: 29 30	l				+ 18	+14	+ 9	+ 5	- ĭ	- Ť	- 13	-21	-29 -25 -22	-39
28	l				+18	+15	+10	+ 6	+ 1	- 5	-11	-18	-25	-34
29					+19	+ 16	+12	+ 7	+ 2	- š	- 8	- 15	-22	-29
30	Į				+20	+17	+13	+ 8	+ 4	- i	- š	-12	-18	- 25

9.	A car with a 14 quart capacity cooling system enters your garage to have the cooling system flushed. How much anti freeze will be needed to complete the job?
	gallons quarts
10.	Which job would require more antifreeze to complete?
	Job 1. 3 cars each with a 12 quart capacity
	Job 2. 2 cars each with a 19 quart capacity
	Answer
	How many quarts of antifreeze would be required to complete both jobs How many gallons?
	Answer quarts
	gallons
GIV	VEN THE SYSTEM CAPACITY FIND THE AMOUNT OF ANTIFREEZE NEEDED TO PROTECT THE SYSTEM TO - 34 F
	System Capacity Antifreeze required

\_\_\_\_ gallons \_\_\_ quarts

\_\_ gallons \_\_\_ quarts



11. 24 quarts

12. 18 quarts

## UNIT 7 QUIZ

Directions: Calculate the following and place your answer in the space provided.

- 1. Find 20% of 87
- 2. 93% of 33 is \_\_\_\_\_

ADD

- 3. 6 1/4 + 8 1/2 + 3 2/4 = \_\_\_\_\_
- 4. Using the chart below, how much antifreeze is recommended for a car with a cooling system capacity of 17 quarts? (-34 degrees F)

gallons	quarts
---------	--------

# QUARTS OF ETHYLENE GLYCOL REQUIRED FOR PROTECTION TO TEMPERATURES SHOWN

Cooling System Capacity		_	ı	Number	of Quart	s of ETH	YLENE	GLYCO	L Requir	red for P	rotection	1		
Quarts	1	2	3	4	5	6	7	8	9	10	11	12	13	14
10	+24°F.	+16°F.	+ 4°F.	- 12°F.	-34°F.	-62°F.								
11 12 13 14 15	+25 +26 +27	+ 16 + 19 + 21	+ 6 +10 +13 +15 +16	- 6 0 + 3 + 6 + 6	-23 -15 - 9 - 5	-47 -34 -25 -18 -12	-57°F. -45 -34 -26							
16 17 18 19 20			+17 +16 +19 +20	+10 +12 +14 +15 +16	+ 2 + 5 + 7 + 9 +10	- 8 - 4 0 + 2 + 4	-19 -14 -10 - 7 - 3	-34°F. -27 -21 -16 -12	-52°F. -42 -34 -28 -22	-50°F. -42 -34	-48°F.			
21 22 23 24 25				+17 +18 +19 +19 +20	+12 +13 +14 +15 +16	+ 6 + 6 + 9 + 10 + 12	0 + 2 + 4 + 5 + 7	- 9 - 6 - 3 + 1	-17 -14 -10 - 6 - 5	-28 -23 -19 -15 -12	-41 -34 -29 -23 -20	-47°F. -40 -34 -29	-46°F. -40	-50°F.
26 27 28 29 30					+17 +18 +18 +19 +20	+13 +14 +15 +16 +17	+ 6 + 9 + 10 + 12 + 13	+ 3 + 5 + 6 + 7 + 8	- 3 - 1 + 1 + 2 + 4	- 9 - 7 - 5 - 3 - 1	16 13 11 8 6	-25 -21 -16 -15 -12	-34 -29 -25 -22 -18	-44 -39 -34 -29 -25

NOTE: +32" is freezing. For capacities under 10 quarts multiply true capacity by 3, find quarts of anti-freeze for the tripled volume, divide by 3 for the number of quarts to add. For capacities over 30 quarts divide true capacity by 3, finds quarts of anti-freeze for the ½ of volume, multiply by 3 for the number of quarts to add.



	CONVERT THE FOLLOWING
5.	6 gallons = quarts
	14 quarts = gallons
	6 liters = ML
	5400 ML = liters
6.	If a manufacturer recommended a solution of water and antifreeze that required 60% antifreeze, what percent would be water?
7.	The car you are servicing has a cooling system capacity of 19 quarts. How many quarts of antifreeze will you need to refill the system after it has been drained?
8.	If three cars were scheduled to be winterized how much antifreeze would you need for all three jobs if the first car had a 12 quart capacity, the second a 14 1/2 quart capacity and the third a 17 3/4 quart capacity?
	gallons quarts
9.	A car with a 14 quart capacity cooling system enters your garage to have the cooling system flushed. How much antifreeze will be needed to complete the job?
	gallons quarts
10.	Which job would require more antifreeze to complete?
	Job 1. 3 cars each with a 12 quart capacity
	Job 2. 2 cars each with a 19 quart capacity
	Answer
	How many quarts of antifreeze would be required to complete both jobs? How many gallons?
	Answer quarts

gallons

### UNIT 8 WORKSHEET

Using the formulas provided calculate the value of the missing Directions: variable in the following problems. Place your answer in the space provided.

## FORMULAS

$$E = I X R$$

$$I = E/R \qquad R = E/I$$

$$R = E/I$$

## COMPUTE THE FOLLOWING

1. 
$$E = 12$$

$$2. \quad \mathbf{E} = \mathbf{6}$$

$$R = 1200$$

$$3. I = .02$$

$$R = 2400$$

4. 
$$E = 12$$

$$R = 150$$

5. 
$$E = 36$$

$$I = 2$$

$$8. R = 1500$$

$$80. = 1$$

7. 
$$R = 900$$

$$\mathbf{E} = \mathbf{6}$$

$$8. I = .06$$

$$E = .5$$

$$9. R = 700$$

$$I = .04$$

$$10. I = 4$$

$$E = 24$$

### UNIT 8 QUIZ

Directions: For questions #1 - 5 use the following formulas to solve the problems below. Be sure to show all work and label your answers.

## **FORMULAS**

 $\mathbf{E} = \mathbf{I} \mathbf{X} \mathbf{R}$ 

I = E/R

R = E/I

E = Volts (volts) I = Current (amps) R = resistance (ohms)

1. 4 volts

.12 amps

•

2. 3.5 amps

200 ohms

R = \_\_\_\_\_ E = \_\_\_\_

3. 2000 ohms

15 volts

I = \_\_\_\_

4. 2 volts

.10 amps

R = \_\_\_\_

5. 1.5 amps

500 ohms

E = \_\_\_\_

- 6. How much current will a light bulb with 10K (10,000) ohms draw when connected to a 36 volt battery?
- 7. How many volts are being applied to a circuit which is reading .002 amps if the resistance is equal to 3000 ohms?
- 8. A mechanic is testing a vehicle component that has a 9 volt battery. The circuit has a measured resistance of 10 ohms. How many amps are there in this circuit?
- 9. During a battery draw test a mechanic obtains a reading of 250 amps. The starters resistance measures 1000 ohms. What is the battery voltage of this vehicle?
- 10. A car equipped with a 12 volt battery gives you a reading of 2 amps while testing the wiper circuit. What is the resistance in the wiper motor?



## UNIT 9 WORKSHEET

Directions: Round the following to two decimal places.



### UNIT 9 QUIZ

Directions: Calculate the following. (round to two decimal places if necessary)

USE THE FOLLOWING INFORMATION FOR QUESTIONS # 6 - 10

Before testing an alternator a mechanic reads the following: "During this test alternator output should not be less than 3/4's of the total rated alternator output."

- 6. If the alternators rated output is 75 amps, what is the minimum value that will be acceptable for output?
- 7. If the alternators rated output is 120 amps, what is the minimum value that will be acceptable for output?
- 8. If the alternators rated output is 90 amps, what is the minimum value that will be acceptable for output?
- 9. If the alternator rated output is 80 amps, would 75 be an acceptable output? (show all work)
- 10. If the alternator rated output is 120 amps, would 85 be an acceptable output? (show all work)



# UNIT 10 WORKSHEET

Dire	ections: Determine the following: (reduce answers if possible to two decimal places)
1.	Ratio of 6 to 8
2.	Ratio of 12 to 156
3.	Ratio of 21 to 72
USE	THE FOLLOWING INFORMATION FOR QUESTIONS #4 - 8
	A car dealers lot has a total of 9 Chevrolets and 4 Fords.
4.	What is the ratio of Chevys to Fords? to
5.	What is the ratio of Fords to Chevys? to
6.	What is the ratio of Chevys to the total cars on the lot?
	to
7.	What is the ratio of Fords to the total cars on the lot?
	to
8.	What is the ratio of the sum of the Fords and Chevys to the total cars on the lot?
	to
USE	THE FOLLOWING INFORMATION FOR QUESTIONS #9 - 10
	A wrench set contains 8 metric and 12 standard wrenches.
9.	What is the ratio of stanJard wrenches to metric wrenches?
	to
10.	What is the ratio of the total set of wrenches to non-metric wrenches?
	to
	$6\delta$



## UNIT 10 QUIZ

Directions: Determine the following ratios: (reduce answers if possible)

6. A cars ring gear has 80 teeth and the pinion gear has 8. What is the ratio of this rear axle?

\_\_\_\_\_ to \_\_\_\_

7. Each rotation of the cars driveshaft causes the vehicles tire to rotate 1/4 turn. What is the ratio between the driveshaft and the tire?

\_\_\_\_\_ to \_\_\_\_

8. A transmission input shaft rotates 1/2 turn causing the output shaft to rotate 1 time. What is the ratio between the input and output shafts?

\_\_\_\_\_ to \_\_\_\_

9. To paint a car an autobody man mixes 1 gallon of paint with 1 quart of reducer. What is the ratio of paint to reducer?

\_\_\_\_\_ to \_\_\_\_

10. A mechanic has 150 bolts. 100 are coarse thread and 50 are fine thread? What is the ratio of coarse to fine thread bolts?

\_\_\_\_\_ to \_\_\_\_



## UNIT 11 WORKSHEET

Directions: Round to two decimal places if necessary

3. 
$$6.4)\overline{181.7}$$

4. .18)
$$346.2$$

6. 
$$.116)970.4$$

9. 
$$8652$$
 $x2.26$ 



# UNIT 11 QUIZ

Directions: Calculate: Round to two decimal places if necessary.

1. 764.3 -587.6

2. 6040.1 -1604.6

3. 5.8)479.2

4. 63)745.6

5. 672 <u>x4.51</u>

# USE THE FOLLOWING INFORMATION FOR QUESTIONS 6 - 10

A customer purchased an automobile with 12,462.3 miles recorded on the odometer. One month later the odometer read 14711.2 miles.

6. How many miles did the new owner drive the first month?

ans. \_\_\_\_\_

7. If the car consumed 104.6 gallons of gas in that time, what was the car's gas mileage?

ans.



8.	If gas costs \$1.21 per gallon how much did the owner spend on gas during the first month? (round to nearest cent)
	ans
9.	The next month the owner drove 1846.5 miles and decided to use a higher octane fuel costing \$1.34 per gallon. What was the cost of fuel the second month?
	ans
10.	The owner gets a tune-up which increases the milage by 5 miles per gallon. Assuming the car will be driven the same distance the third month as the second, and the owner will continue to use the more expensive gas, how much money will be saved over the second of criving in the cost of fuel?
	ans

#### UNIT 12 WORKSHEET

Directions: Calculate the following examples. Round to two decimal places if necessary.

1. .980 -.033 2. 11.600 -.060 3. 9.560 -.052

4. .860 -.015

- 5. 7.500 -.034
- 6. A mechanic is turning a drum that measures 9.553. The manual says the drum may only be turned to 9.560. How much material can be safely removed from this drum?
- 7. A brake rotor measures .808 inches thick. Discard thickness for this rotor is .815. How much was this rotor turned undersize?
- 8. A brake lathe cuts on both sides of a rotor. If each cutter is set to .015" what will the total amount of material being removed equal?
- 9. A mechanic cutting a brake drum removes .008" on the first cut, .006" on the second cut and a final cut of .002. What is the total amount of material removed?
- 10. A mechanic cutting a brake rotor removes ..004" on each side during the first pass and .002" on each side during the final pass. What is the total amount of material removed?



## UNIT 12 QUIZ

Directions: Calculate: Round to two decimal places if necessary.

1. .980 -.014

 $\begin{array}{c} 2. & 11.600 \\ -.022 \end{array}$ 

3. 9.560 -.044

4. .860 -.024

- 5. 7.500 -.022
- 6. A mechanic is turning a drum that measures 9.512. The manual says the drum may only be turned to 9.560. How much material can be safely removed from this drum?
- 7. A brake rotor measures .812 inches thick. Discard thickness for this rotor is .815. How much was this rotor turned undersize?
- 8. A brake lathe cuts on both sides of a rotor. If each cutter is set to .003" what will the total amount of material being removed equal?
- 9. A mechanic cutting a brake drum removes .010" on the first cut, .008" on the second cut and a final cut of .004. What is the total amount of material removed?
- 10. A mechanic cutting a brake rotor removes .006" on each side during the first pass and .003" on each side during the final pass. What is the total amount of material removed?



## ANSWER KEY

## PG. 7

- 3. 6/32, 20/32, 16/32, 24/32, 28/32, 14/32, 18/32, 5/32
- 4. 5/32, 6/32, 14/32, 16/32, 18/32, 20/32, 24/32, 28/32
- 5. 13
- 6. 9/16"

#### PG. 9

1. 337 CID

6. 243 CID

2. 57 CID

7. 340 CID

3. 905 CID

8. 60 CID

4. 471 CID

9. 151 CID

5. 346 CID

10. 101 CID

## PG. 13

- 1. 136 PSI
- 2. 28.5 PSI
- 3. 1.5 PSI
- 4. 30 PSI

## PG. 15

- 2. A. 4 TIMES
  - B. 8 TIMES
- 3. 13 7/12 QTS.

## PG. 16

- 1. A. 6000 MILES
  - B. 6 MONTHS
- 2. A. 3,285 QTS./YR.
  - B. 273.75 QTS./YR.
  - C. 63.17 QTS./WEEK
  - D. \$4.41/WEEK
    - \$19.18/MONTH
    - \$229.95/YEAR

4. A. 66.66%

B. 37.5% C. 50%

PG. 18

1. 20%

2. 25%

4. A. 60%

B. 40%

3. 2 CYLINDERS

PG. 21

1. 1/4

2. 5/12

3. 1/3

PG. 22

1. 130 DEGREES

2. RING AND VALVE STICKING

.0005 IN. 3.

4. 35 GPH 2100 GALLONS

5. 26 HP

6. 32 DEGREES

7. .008 IN.

29 HP 8.

9. 38 GPH 2280 GALLONS

10. 130 DEGREES

PG. 25

2. 9.5 QTS.

3. 14.75 QTS.

PG. 27

1. 600 OHMS

6. 18,000 OHMS

2. .005 AMPS

7. .004 AMPS

3. 750 VOLTS

8. 132 VOLTS

4. 200 OHMS

9. .25 OHMS

5. .005 AMPS

10. .0033 AMPS



- 11. 4 AMPS

12. 48,000 VOLTS

- 13. 300 OHMS
- 14. .001 AMPS
- 15. 18 VOLTS
- PG. 30
- 1. 40 AMPS
- 2. 66 2/3 AMPS
- 3. 33 1/3 AMPS
- PG. 38
- 1. .025 IN.
- 2. .037 IN.
- PG. 42
- 1. 1650
- 3. 702
- 5. 211,593
- 7. 26.958 26.96
- 9. 220.359 220.36
- 10. 30 INCHES 8 FT. 6 IN. .64 CM 14.72 METERS 2.54 CM

- 16. 1200 OHMS
- 17. 4800 AMPS
- 18. 1500 VOLTS
- 19. 300 OHMS
- 20. .01 AMPS

- 3. 11 IN.
- 4. .032 IN.
- 2. 2334
- 4. 12288
- 6. 132,430
- 8. 189.182 189.18



- 1. 606
- 2. 9958
- 3. 38,012
- 4. 175.552 175.55
- 56 IN. 5. 25 FT. 3 IN. .62 M 1000 CM 2.54 CM

- 6. 85.666 OR 85'8"
- 7. 457.5 SQ. FT.
- 8. 4347.43 CU. FT.
- 9. 5 GALLONS
- 10. 3.1 MIN OR 3 MIN 6 SEC.

### PG. 45

- 1. 2 3/16"
- 2. MEASURE
- 3. 3/12, 6/12, 8/12
- 4. 6/20, 7/20, 8/20, 10/20
- 6/32, 8/32, 10/32, 16/32, 17/32 10. 4/16, 5/16, 6/16, 7/16 5.

- 6. 8/12 = 2/3
- 7. 7/8
- $8. \quad 19/12 = 1 \quad 7/12$
- 9. 58/60 = 29/30

### PG. 46

- 1. 1 5/16"
- 2. **MEASURE**
- 3. 15/32
- 4. 8/11
- 5. 49/60
- 6. 2/32, 12/32, 14/32, 16/32
- 5/20, 6/20, 8/20, 16/20 7.

- 8. 8
- 9. 13/16"
- 10. 1/4", 5/16" 1/2"



- 1. 1.764
- 2. 2.2715
- 3. 435.08

- 4. 23.12236
- 5. 1983.52

6. 137.43

- 7. 7.01
- 8. 62

9. 22.96

10. 86.32

PG. 48

1. 418.11

- 2. 116.388
- 3. 11.722

4. 6

- 5. 6.72
- 6. 157.25

7. 27.75

- 8. 7.25
- 9.  $.85 \times 165 = 140.25 \text{ YES}$

10. A. 148 CID B. 511 CID

PG. 49

- 1. 8 5/16 2. 5 7/8
- 3. A. 16 QTS.
  - B. 4 GALLONS 2 QTS.
  - C. 365 DAYS
  - D. 52 WEEKS
  - E. 12 MONTHS
- 4. 10 1/2
- 21 5/7 5.
- 5 1/3 6.
- 7. 8 1/2
- 8. 12 11/12
- 9. \$155.20
- 10. 12.16

1. 13 5/12

2. 21 1/3

3. 8 GALLONS 1 QT. 12 QTS.

4. \$166.86

52 WEEKS

5. 150.89

6. 7 TIMES

7. 3102.5 QTS.

PG. 51

8. 7 TIMES

9. \$238.00

10. 9 OIL CHANGES 27 QTS OIL REQ.

\$45.63

PG. 52

1. 50%

2. 43%

3. 34%

4. 40

5. 4

6. 25%

7. 33%

8. 37.5%

9. 70%

10. 53%

PG. 53

1. 78%

2. 75%

3. 20%

4. 75%

5. 50%

6. 25%

7. 6 CYLS.

8. 38%

9. 25%

10. 50%

PG. 54

1. 4/9

2. 3/18

3. 7/18

4. 17/18

5. 7/9

6. 1/11

7. 1

8. 2/3 OF 12 8, TYPE B

PG. 55

9. 3/5

10. FOR EVERY 6 CARS THE DEALER HAS ON THE LOT, ONLY ONE CARS DOES NOT HAVE 4 CYLINDERS.

PG. 56

1. 7/24

2. 1/3

3. 1/2

4.. 3/8

5. 2/3

6. 1, 2

7. 1/3 8. 1/2 9. 1/6 10. 5/6

PG.58

1. A. .08 B. .024

2. 31 3. 11.96 4. 3.45

B. .024 C. 1.85

D. .0003

E. .47

5. 285.6

6. 26 1/4 7. 19 7/12

8. A. 64 QTS.

B. 25 GALLONS, 2 QTS.

C. 32 QTS.

F. 82000 ML G. 1.043 LITERS

H. .064 LITERS

D. 4 GALLONS, 0 QTS.

E. 3000 ML

PG. 59

9. 1 GALLON, 3 QTS. 10. JOB 2 11. 3 GAL., 0 QTS. 74 QTS.

18.5 GAL.

12. 2 GAL., 1 QT.

PG. 60

1. 17.4% 2. 30.69 3. 18 1/4 4. 8.5 QTS.

PG. 61

5. 24 QTS. 6. 40% 7. 9.5 QTS. 8. 11 GAL 1/4 QT.

3.5 GAL. 6000 ML 5.4 LITERS

9. 1 GAL., 3 QTS. 10. JOB 2

74 QTS.

18.5 GALLONS

PG. 62

1. 2.4

2. .005 3. 48

4. .08

5. 18

6. 120 7. .006 8. 8.3 9. 28

10.6

- 1.
   33.3
   2.
   700
   3.
   .0075
   4.
   20
   5.
   750.
- 6. .0036 7. 6 8. .9 9. 250,000 10. 6

PG. 64

- 1. 10 2. 55 3. 75 4. 143 5. 21.88
- 6. 71.14 7. 45 8. 36 9. 8.36 10. 2280

PG. 65

- 1. 21.5 2. 21 3. 63.63 4. 3.78 5. 54.75
- 6. 56.25 7. 90 8. 67.5 9. 3/4 OF 80 = 60 75>60 YES
- 10. 3/4 OF 120 = 90 90>85 NO

PG. 66

- 1. 3/4 2. 1/13 3. 7/24 4. 9 TO 4 5, 4 TO 9
- 6. 9 TO 13 7. 4 TO 13 8. 13 TO 13 9. 12 TO 8 10. 20 TO 12 1 TO 1 3 TO 2 5 TO 3

PG. 67

- 1. 12 TO 16 2. 25 TO 180 3. 110 TO 15 4. 7 TO 72 5. 36 TO 48 3:4 5:36 22:3 3:4
- 6. 10 TO 1 7. 1 TO 1/4 8. 1/2 TO 1 9. 4 TO 1 10. 100 TO 50 4 TO 1 1:2

PG. 68

- 1. 11,528.3 2. 15,178.3 3. 28.39 4. 1923.33 5. 10.54
- 6. 8365.52 7. 255.96 8. 639.02 9. 19,553.52 10. 2651.67

PG. 69

- 1. 176.7 2. 4435.5 3. 82.67 4. 11.83 5. 3030.72
- 6. 2248.9 7. 21.5

8. \$126.57 9. \$115.11 16. \$21.71

PG. 71

1. .947" 2. 11.54" 3. 9.508" 4. .845" 5. 7.466"

6. .007" 7. .007" 8. .030" 9. .016" 10. .012"

PG. 72

 1. .966"
 2. 11.578"
 3. 9.516"
 4. .836"
 5. 7.478"

6. .048" 7. .003" 8. .006" 9. .022" 10. .018"